



Thermal Printer Mechanism

LTPA245



- Max printing speed: 90mm/sec
- Compact and light-weight
- Platen latch function

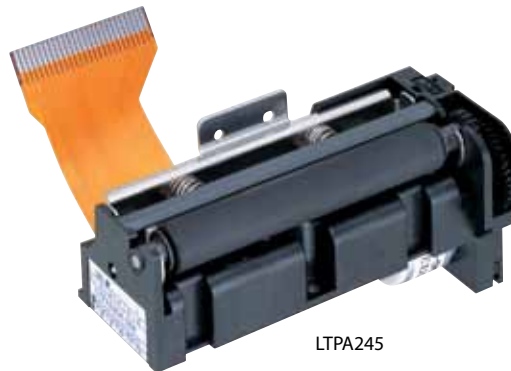

LTPA245

Model		LTPA245
Printing	Method	Thermal line dot printing
	Number of dots/line	384
	Resolution (dots/mm)	8
	Paper width (mm)	58 ^{*0}
	Printing width (mm)	48
	Speed (mm/sec)max	90
	Paper path	Curved
Detection	Head temperature	By thermistor
	Out of paper	By photo interrupter
Power supply (V)	Operation voltage (Vdd)	2.7 to 3.6 / 4.75 to 5.25
	Operation voltage (Vp)	4.5 to 8.5
Peak current (A)	Head	2.6 (8.5V / 64 dots)
	Motor	0.6
Service life	Pulse activation (pulse)	100 million
	Abrasion resistance (km)	50 ^{*1}
Operating temperature (°C)		0 to 50
Dimensions (W x D x H mm)		69.2 x 28.3 x 31.7 ^{*2}
Mass (g)		Approx.42

*1 Use recommended thermal papers *2 Excluding protrusion

Specifications are subject to change without notice.



Seiko Instruments GmbH
 Siemensstraße 9
 D-63263 Neu-Isenburg, Germany
 Phone +49 6102 297 100
 Fax +49 6102 297 50 100
 info@seiko-instruments.de
 www.seiko-instruments.de

