



# 038

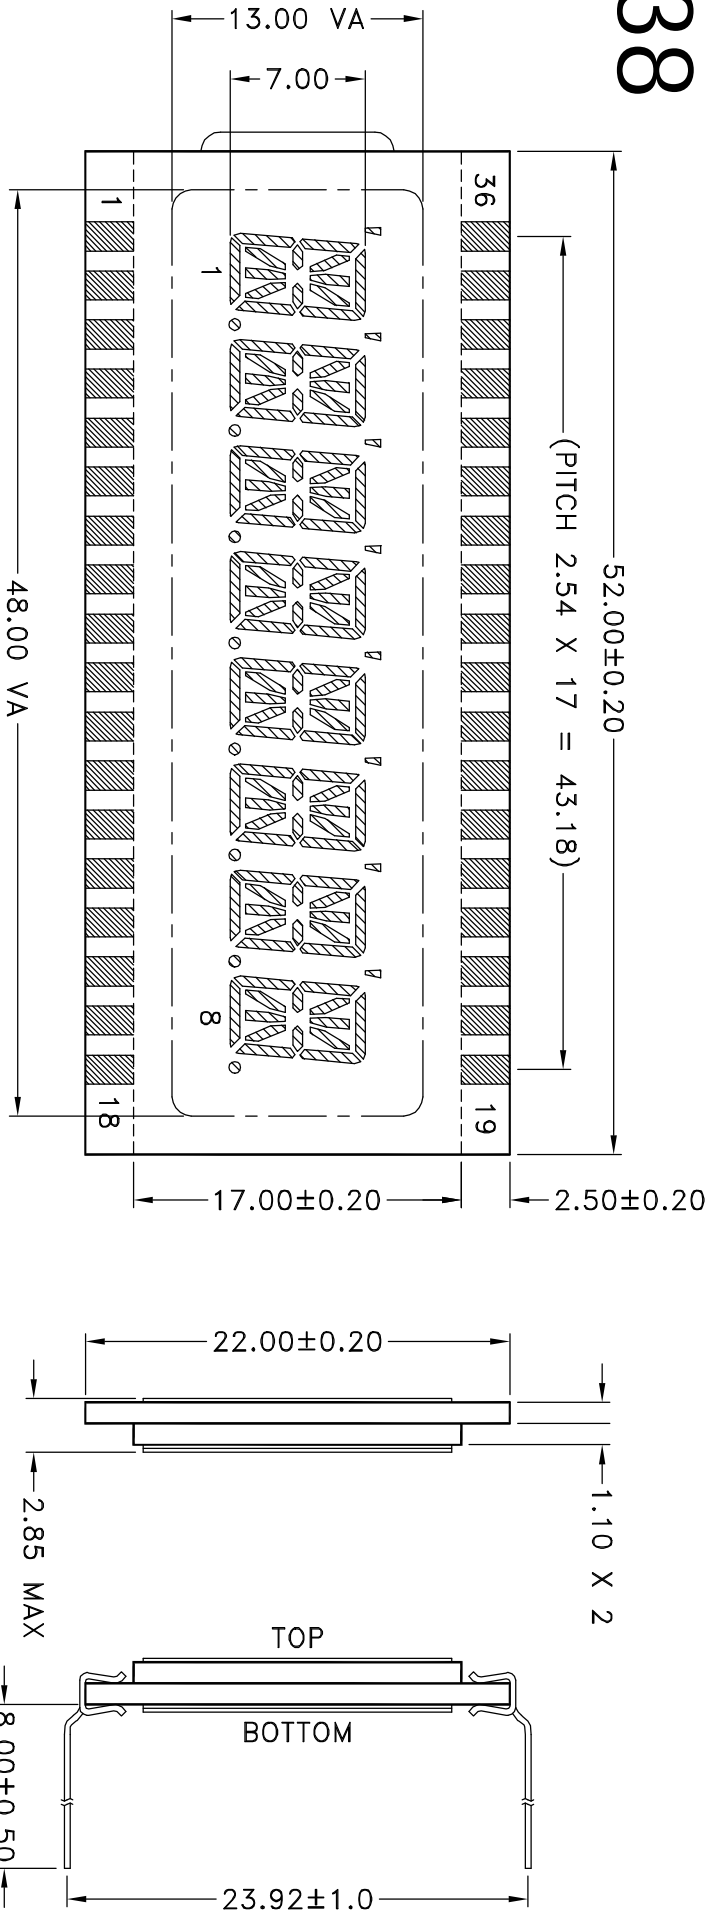

ELASTOMER TYPE PIN TYPE

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM1	1D	1K	2D	2K	3D	3K	4D	4K	5D	5K	6D	6K	7D	7K	8D	8K	COM1	/
COM2	1E	1J	2E	2J	3E	3J	4E	4J	5E	5J	6E	6J	7E	7J	8E	8J	/	COM2
COM3	1F	1I	2F	2I	3F	3I	4F	4I	5F	5I	6F	6I	7F	7I	8F	8I	/	/
COM4	1S	1H	2S	2H	3S	3H	4S	4H	5S	5H	6S	6H	7S	7H	8S	8H	/	/
PIN	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36
COM1	/	/	8P	8L	7P	7L	6P	6L	5P	5L	4P	4L	3P	3L	2P	2L	1P	1L
COM2	/	/	8C	8M	7C	7M	6C	6M	5C	5M	4C	4M	3C	3M	2C	2M	1C	1M
COM3	COM3	/	8B	8N	7B	7N	6B	6N	5B	5N	4B	4N	3B	3N	2B	2N	1B	1N
COM4	/	COM4	8A	8G	7A	7G	6A	6G	5A	5G	4A	4G	3A	3G	2A	2G	1A	1G



- NOTES:
1. LCD MODE : TN
  2. OPERATING VOLTAGE : 3.0V
  3. DRIVE METHOD : 1/4 DUTY, 1/3 BIAS
  4. VIEW DIRECTION : 6 / 12 O'CLOCK
  5. OPERATING TEMP : NORMAL : -10°C TO 60°C, WIDE : -30°C TO 80°C
  6. STORAGE TEMP : NORMAL : -20°C TO 70°C, WIDE : -40°C TO 85°C
  7. POLARIZER MODE : REFLECTIVE / TRANSMISSIVE / TRANSMISSIVE

VERSION : 1

**Displaytech Ltd**

email : [sales@displaytech.com.hk](mailto:sales@displaytech.com.hk)  
 Fax : +852 2722 6998