
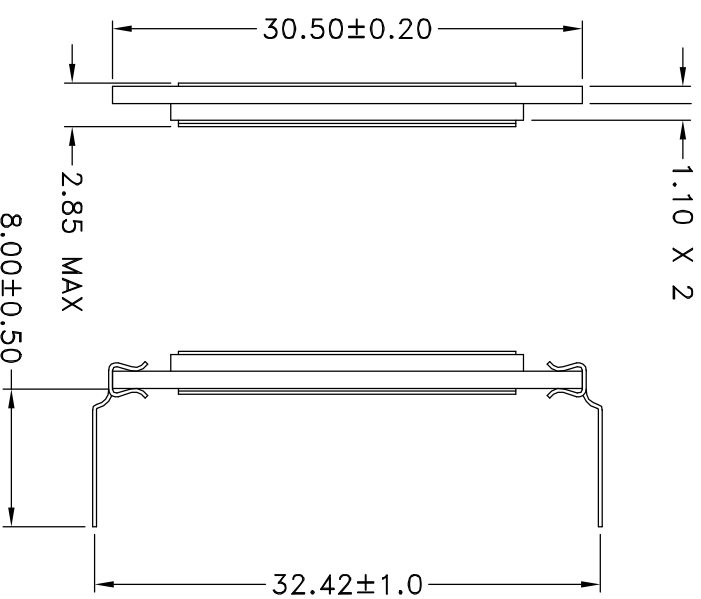


066

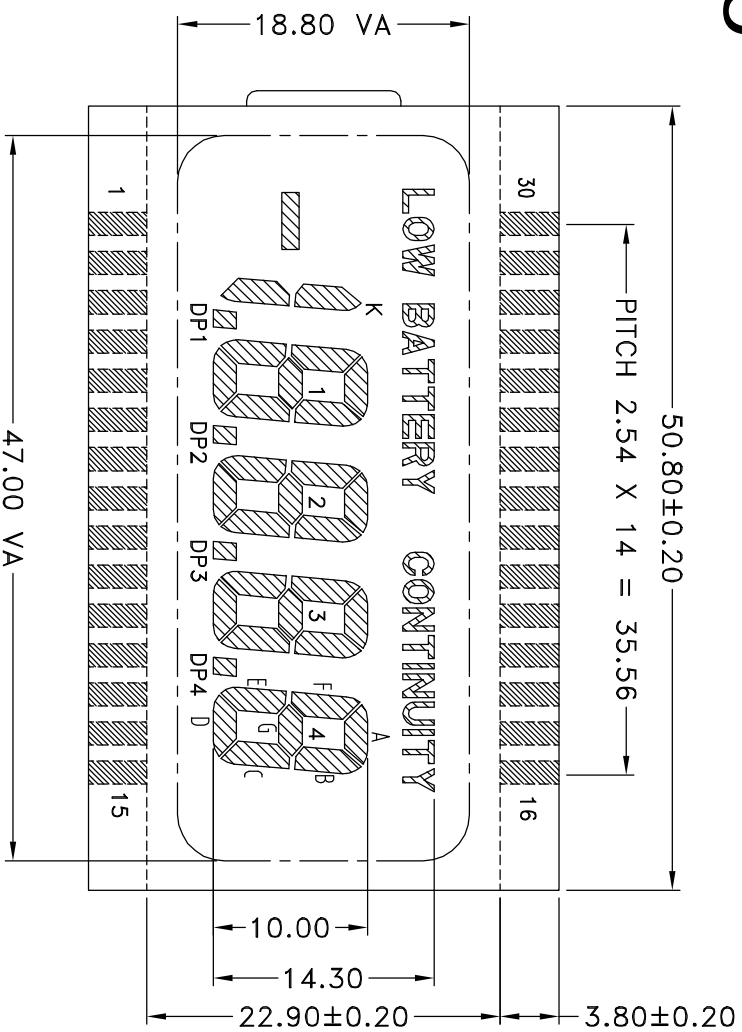

ELASTOMER TYPE PIN TYPE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16-30
1F	1A	1B	2F	2A	2B	3F	3A	3B	4F	4A	4B	COM1			NC
1E	1G	1C	2E	2G	2C	3E	3G	3C	4E	4G	4C		COM2		
DP1	1D	K	DP2	2D	—	DP3	3D	LO BAT	DP4	4D	CONT			COM3	

NOTES :

1. LCD MODE : TN
2. OPERATING VOLTAGE : 3.0V
3. DRIVE METHOD : 1/3 DUTY, 1/3 BIAS
4. VIEW DIRECTION : 6 / 12 O'CLOCK
5. OPERATING TEMP : NORMAL : -10°C TO 60°C, WIDE : -30°C TO 80°C
6. STORAGE TEMP : NORMAL : -20°C TO 70°C, WIDE : -40°C TO 85°C
7. POLARIZER MODE : REFLECTIVE / TRANSMISSIVE / TRANSMISSIVE

VERSION : 1

Displaytech Ltd

email : sales@displaytech.com.hk

Fax : +852 2722 6998