


# 080

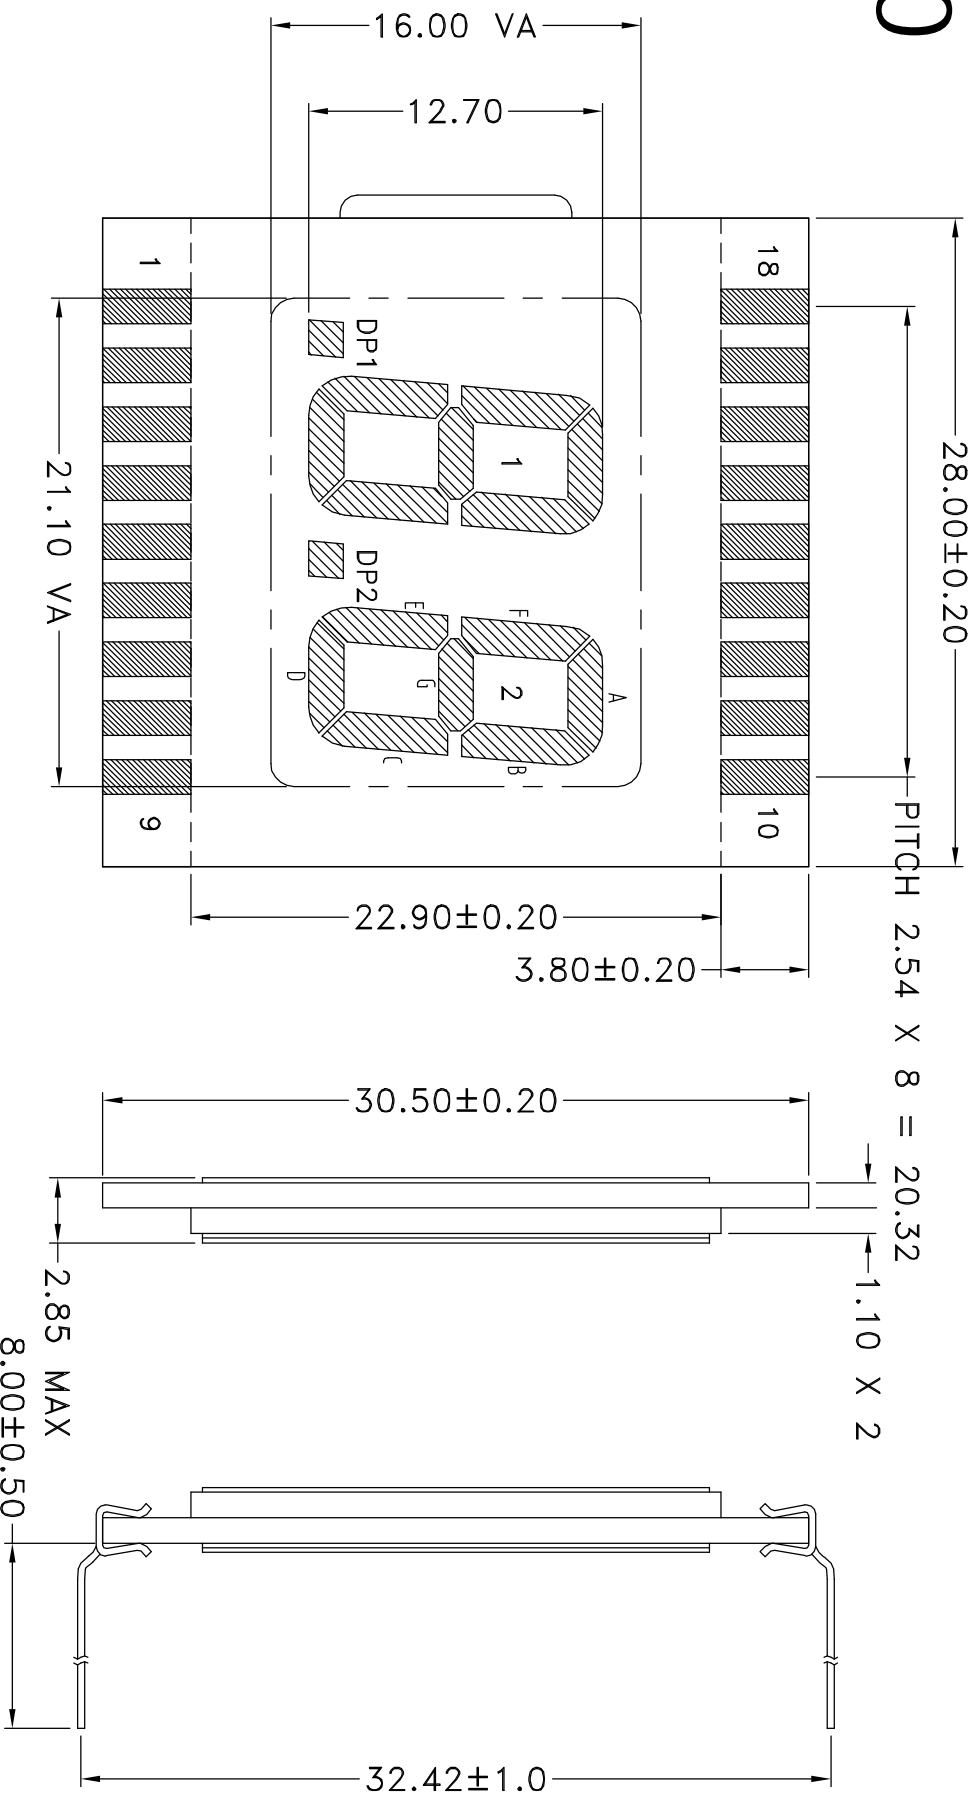

**NOTES:**

1. LCD MODE : TN
2. OPERATING VOLTAGE : 3.0V
3. DRIVE METHOD : STATIC
4. VIEW DIRECTION : 6 / 12 O'CLOCK
5. OPERATING TEMP : NORMAL : -10°C TO 60°C, WIDE : -30°C TO 80°C
6. STORAGE TEMP : NORMAL : -20°C TO 70°C, WIDE : -40°C TO 85°C
7. POLARIZER MODE : REFLECTIVE / TRANSMISSIVE / TRANSMISSIVE

VERSION : 1

ELASTOMER TYPE PIN TYPE

PIN	1	2	3	4	5	6	7	8	9
COM	COM	DP1	1E	1D	1C	DP2	2E	2D	2C
PIN	10	11	12	13	14	15	16	17	18
COM	2B	2A	2F	2G	1B	1A	1F	1G	COM

**Displaytech Ltd**

email : [sales@displaytech.com.hk](mailto:sales@displaytech.com.hk)  
 Fax : +852 2722 6998