


173

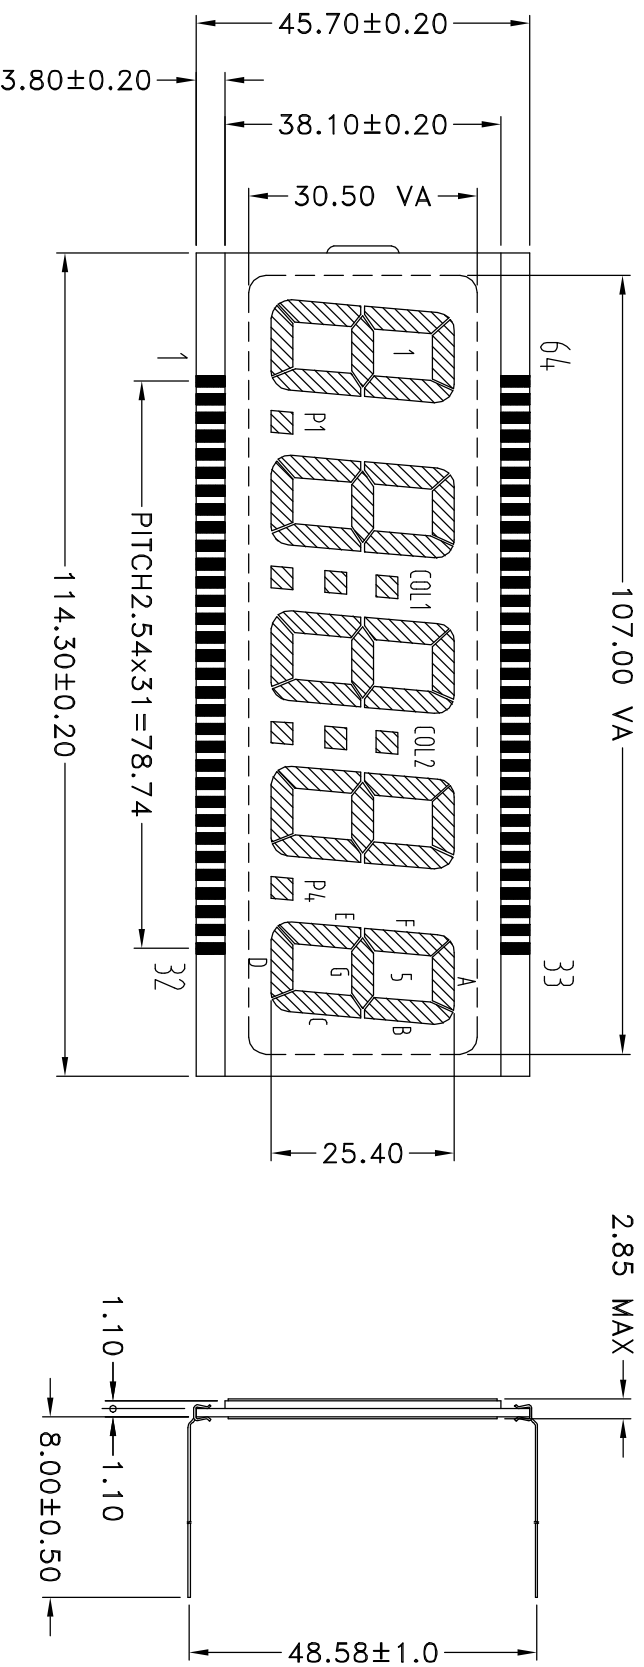

PIN TYPE

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM	COM	1E	1D	1C	P1	2E	NC	NC	2D	2C	NC	P2	NC	3E	NC	NC	NC	3D	3C	P3
PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
COM	NC	NC	4E	NC	4D	4C	NC	P4	5E	5D	5C	5B	5A	5F	5G	NC	NC	4B	4A	NC
PIN	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
COM	NC	4F	4G	COL2	3B	3A	NC	NC	NC	3F	3G	COL1	NC	2B	2A	NC	NC	2F	2G	1B
PIN	61	62	63	64																
COM	1A	1F	1G	COM																

NOTES:

1. LCD MODE : TN
2. OPERATING VOLTAGE : 3.0V
3. DRIVE METHOD : STATIC
4. VIEW DIRECTION : 6 / 12 O'CLOCK
5. OPERATING TEMP : NORMAL : -10°C TO 60°C, WIDE : -30°C TO 80°C
6. STORAGE TEMP : NORMAL : -20°C TO 70°C, WIDE : -40°C TO 85°C
7. POLARIZER MODE : REFLECTIVE / TRANSMISSIVE / TRANSMISSIVE

VERSION : 1

Displaytech Ltd

email : sales@displaytech.com.hk
Fax : +852 2722 6998