


SK1-21H/31H

Kiosk Printer Unit

 SANEI ELECTRIC INC.

- **12V** Power supply
- Easy operation with head open function
- Printing up to **150mm/sec**
- With a power-saving mode for solar battery
- Paper thickness **0.059-0.10mm**

NEW

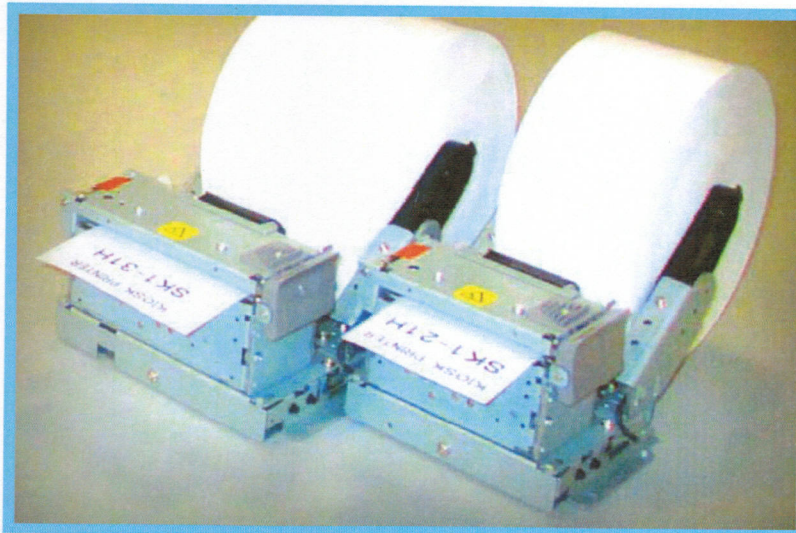

Specifications	SK1-21H	SK1-31H
Printing method	Direct line thermal dot	
Resolution	203dpi (8dot/mm)	
Number of dots	Max.448dot	Max.640dot
Printing width	Max.56mm	Max.80mm
Printing speed	Max. 150mm/sec Max. 120mm/sec (power saving mode)	
Paper style	Receipt paper	
Paper thickness	0.059~ 0.10mm	
Paper width	60/58mm	83/80/60/58mm
Paper OD	Max.Φ120mm (Φ200mm available)	
Character font	8x16, 12x24, 24x24(KANJI), 16x16(KANJI)	
Barcode	JAN13/8, CODE3, ITF, CODABAR, CODE128, UPC-A/E (option) QR, Maxicode, PDF417	
Paper sensor	Paper end, Near paper end, Black mark, Label gap(option)	
Paper loading	Head open or Auto loading	
Auto cutter	Full and partial cut (Command selectable)	
Interface	RS232C Serial+USB	
Emulations	ESC/POS™ Conformity	
Power supply	12VDC±10%	
Operating temperature	-25—50 °C 20%—85%RH (non-condensing)	
Storage temperature	-30 —70 °C	
Reliability	150km, 200million pulses / Print head 1,000,000 cuts/Cutter	
Standards	CE, FCC, VCCI	
Overall dimensions	104(W)×145.5(D)×85.4(H)mm	127(W)×145.5(D)×85.4(H)mm
Mass	Approx. 525g	Approx. 630g

ESC/POS™ : Registered trade mark of SEIKO EPSON CORP.