


Sub-assembled Printer Unit

APU-2242-A02U



- Max. printing speed: 90 mm/s
- Roll paper capacity: up to Ø 87 mm
- Interface: USB model
- Compact design with Presenter
- Windows® Driver (XP / Vista)

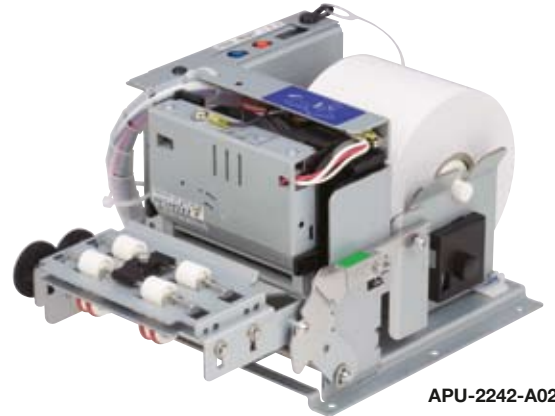

APU-2242-A02U

Model		APU-2242-A02U
Printing	Methods	Thermal line dot printing
	Number of dots/line	432
	Resolution (dots/mm)	8
	Paper width (mm)	60 ⁺⁰ ₋₁
	Printing width (mm)	54
	Speed (mm/s) max	90
	Paper path	Straight
	Character matrix (HxW dots)	24 x 24, 24 x 12, 16 x 16, 16 x 8
	Character dimensions (HxW mm)	3.0 x 3.0, 3.0 x 1.5, 2.0 x 2.0, 2.0 x 1.0
Character type		Optional Font, Downloaded Character, Extended Graphics Character set Katakana Character set, JIS 1&2 level Kanji
Barcode		UPC-A/E, JAN(EAN)8/13, ITF, CODE39, CODABAR, CODE93, CODE128 PDF417, Data Matrix, Maxi Code, QR Code
Power supply (V)		21.6 to 26.4
Communication interface		USB
Input buffer		256 bytes
Command		SII Standard
Cutting	Method	Slide type
	Cutting type	Full cut
	Pulse activation (pulse)	100 million
Service Life	Abrasion resistance (km)	50*1
	Life (cut)	300,000
Operating temperature (°C)		0 to 50
Dimensions (WxDxH mm)		145.0 x 203.0 x 112.0 *2
Mass (g)		Approx. 1400

*1 Use recommended thermal papers. *2 Excluding protrusion.
Windows® is the registered trademark of Microsoft Corporation (USA).

USB interface specification

USB printerclass 2.0 conformity



Seiko Instruments GmbH
Siemensstraße 9
63263 Neu-Isenburg
Germany
Telephone: 49-6102-297-0
Facsimile: 49-6102-297222

Specifications subject to change without notice.